


THIS  
AREA  
/  
POINT  
IS  
ADJUSTABLE  
ALLOWING  
MORE  
OR  
LESS  
LASH  
AT  
THE  
ROCKER  
TO  
VALVE  
CONTACT  
POINT.  
CORRECT  
PUSHROD  
LENGTH  
AND  
ADJUSTERS  
ARE  
REQUIRED  
TO  
ACCOMPLISH  
THIS

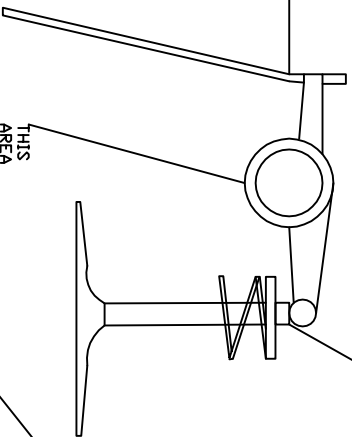

THIS  
AREA  
/  
POINT  
IS  
A  
CONSTANT  
UNLESS  
THE  
SPRING  
AND  
VALVE  
INSTALLED  
HEIGHT  
IS  
CHANGED

GEOMETRY OR THE DISTANCE A ROCKER TIP  
TRAVELS FROM ONE SIDE OF THE VALVE  
STEM FROM MAX DEFLECTION TO THE  
OPPOSITE SIDE. IN 0 DEFLECTION CAN ONLY  
BE MODIFIED BY CHANGING ONE OF TWO  
COMPONENTS ON A BB MID-PAK.

THIS  
AREA  
/  
POINT  
IS  
A  
CONSTANT  
UNLESS  
SOMEHOW  
THE  
SHAFT  
IS  
RAISED  
OR  
LOWERED.