


ALWAYS use recommended SPRINGS and LIFTERS

Part # 10230703

Grind # VDBCR-271

Serial # _1D

Lobe Separation 110

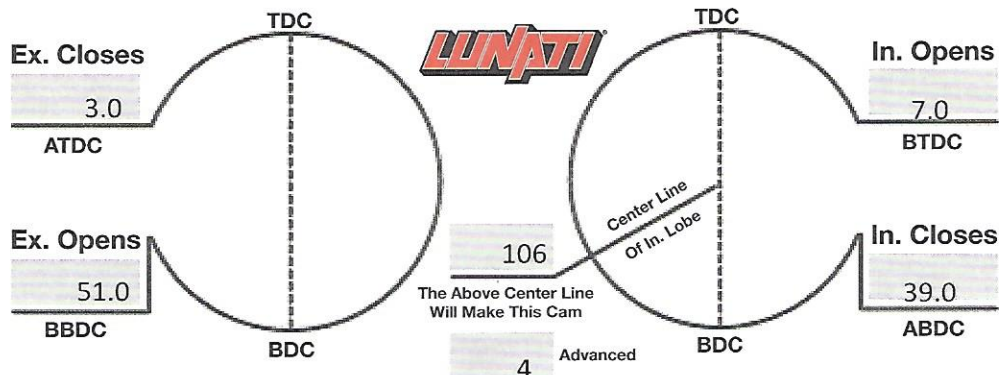

Recommended Kit # 73100K7

Consists Of The Following Parts

Lifters 71977PR-16

Outer Spring 73100-16

Inner Spring

Retainers 75740-16

Valve Locks 77127-16

Installed Height = Lbs.

- Lift At Valve -
0.494 IN. 0.513 EX.

- Rocker Ratio -
1.500 IN. 1.500 EX.

- Valve Adjustment -
0.000 IN. 0.000 EX.

Timing Figures Obtained At .050" Tappet Lift

- Duration At .050" Tappet Lift -
226 IN. 234 EX.

- Advertised Duration -
271 IN. 279 EX.

Specific guidelines apply to the warranty of your Lunati camshaft. Please refer to the reverse side for complete details.



11126 WILLOW RIDGE DRIVE
OLIVE BRANCH, MS 38654
PHONE: (662) 892-1500
WWW.LUNATIPOWER.COM

Application

CHRYSLER 361-440 3 BOLT V8