



Videos Contact Us
☒ Keyword ☐ Part # ☐ Grind #
 Search

Camshafts
 Shop By Engine
 Components
 Merchandise
 Tech Support Forum
 Cam Recommendation
 Contact Us
 Warranty Registration
 Social Media
 CPG Nation Community
 Events Schedule
 Join Our Mailing List
 Charts, Graphs, & Specs
 Technical FAQ
 Technical Info
 Articles
 Instructions
 Camshaft Sounds
 Videos
 CamQuest™ Online
 Catalogs Online
 What's New
 About COMP Cams®
 Logo & Image Archive
 Contingency Program
 Sales Rep Sign-In
 Policies
 Site Map

Description

Part Number: **21-232-4(Single Bolt) [2]** Grind Number: **XS282S**
 Lifter Type: **Solid Lifter**
 Engine Family: **Chrysler 383-440 C.I. 8 CYL. 1959-1980**

[Return to Store Item](#)


Description:

Solid-Very Strong Mid & Upper RPM Power • 10:1 Compression w/ 3000+ Stall


Cam Family:

Xtreme Energy™ Mechanical Flat Tappet Camshafts

Specifications

			Intake	Exhaust
RPM Range:	2500 to 6500	Valve Lash:	0.016	0.018
Valve Timing:	0.015	Duration:	282	290
Lobe Separation:	110°	Duration @ .050" Lift:	244	252
Intake Centerline:	106°	Valve Lift:	0.52	0.54
		Lobe Lift:	0.347	0.361

Valve Timing @ 0.015 Lift:

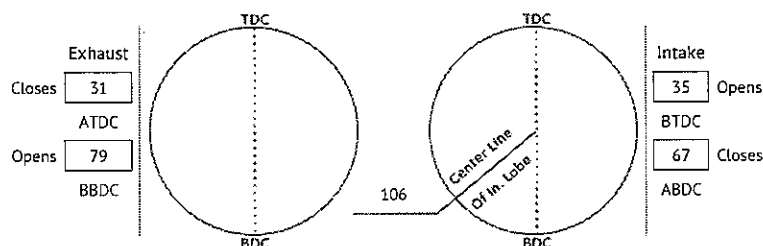

Recommended Components

Component	Part Number
Complete K-Kit	K21-232-4
Cam & Lifter Kit CL-Kit	CL21-232-4 [7]
Lifter Kit	821-16 / 801-16 [76]
Timing Set	2104 / 3104
Rocker Arms	1621-16 [23] / 1071-KIT [23]
Valve Springs	924-16 26120-16 [2]
Steel Retainers	741-16 / 795-16
Valve Locks	627-16 [26]
Valve Seals	505-16 [2]
Camshaft Break-In Lube	159

Installation Notes (These notes apply to the above recommended components with the trailing installation note numbers)

Note	Description
2	[2] Requires machining on cylinder heads.
23	[23] Includes special shafts & spacers.
26	[26] 1/2 set 2 groove; 1/2 set 4 groove.
28	[28] 3-Bolt core available. Change first 2 digits of part # to 23.
76	[76] Oils through pushrods.

[Contact us via email](#)